

# CLOPAY COMMERCIAL – MODEL 3717, 3718 energy series with intellicore®



Model 3717, 16'2" x 14' Doors; Shown with 24" x 8" Lites


| CONSTRUCTION               | EFFICIENCY             | WARRANTY                               |
|----------------------------|------------------------|--|
| <b>1 3/4"</b><br>THICKNESS | <b>16.2</b><br>R-VALUE | <b>10YR</b><br>LIMITED<br>CONSTRUCTION |



## POLYURETHANE INSULATED STEEL DOORS

Clopay Models 3717 and 3718 are for commercial and industrial facilities where temperature control, energy efficiency and durability considerations are all important.

- Intellicore® polyurethane insulation and thermal break for improved energy efficiency.
- Three-layer steel plus steel insulation enhances durability, strength and quiet operation.
- 3-stage paint process delivers a virtually maintenance-free finish.
- Injection-molded lite frames with integral weatherseal are durable and seal against the elements. Many glass options available for visibility, privacy or energy efficiency.




Panels are preprimed inside and out to inhibit rust. Hot-dipped, galvanized steel is painted with primer and given a tough oven-baked polyester top coat to provide the most rust-resistant steel door available. Ten-year warranty against rust-through.

## PANEL DESIGNS



## COLOR OPTIONS

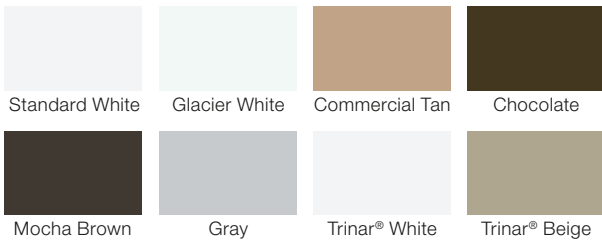

Due to the printing process, colors may vary.

## CUSTOM PAINT OPTION



Color Blast® offers more than 1,500 Sherwin-Williams® color options to complement your building design. This durable two-part paint system has been thoroughly tested and is backed by a five-year warranty.

Due to solar reflective formulation to meet greater than a 38 LRV, some colors may not be available.

## FEATURES

### STANDARD HARDWARE

- TPE astragal in aluminum retainer
- Commercial 10-ball steel rollers (nylon tires available)
- Steel step plate and lift handle
- Galvanized steel end stiles
- Inside slide lock for increased security
- 2" (50.8 mm) or 3" (76.2 mm) track
- 10,000 cycle springs
- Galvanized aircraft cable with minimum 7:1 safety factor
- Variety of track configurations to meet building specifications

### MATERIALS AND CONSTRUCTION

|                    |   |
|--------------------|---|
| Panel Thickness    | 1-3/4" (44.45 mm)   |
| Insulation         | CFC and HCFC-free Intellicore® polyurethane   |
| R-value            | 16.2*   |
| Thermal Break      | Continuous foam   |
| Exterior Steel     | 27 gauge (.016" min.) (.41 mm)  |
| Interior Steel     | 28 gauge (.015" min.) (.38 mm)  |
| Exterior Surface   | Stucco embossed, minor ribbed (3717)<br>Stucco embossed, flush (3718)   |
| Max Width          | 3717: 32'2" (9.8 m); 3718: 32'2" (9.8 m)  |
| Max Height         | 3717: 26' (7.9 m); 3718: 24' (7.3 m)  |
| Exterior Colors    | Standard White, Glacier White, Commercial Tan, Chocolate, Mocha Brown, Gray, Trinar® White and Trinar® Beige. Also available in Color Blast®. |
| Interior Color     | Standard White  |
| Limited Warranties | 10-year delamination<br>10-year rust-through<br>1-year material and workmanship   |

\*Calculated door section R-value is in accordance with DASMA TDS-163.

For special sizes, applications and options, consult Commercial Information Assistance (CIA) at 1-800-526-4301.

## ADDITIONAL OPTIONS

### WINDOW OPTIONS



Available with insulated, insulated tempered or tempered glass. Full-view section, pre-painted Standard White or Chocolate; glazing options include DSB, tempered, plexiglass, insulated, insulated tempered and polycarbonate. 26" x 13" (66.04 cm x 33.02 cm) windows are available with Lexan® or plexiglass.

### HEAVY-DUTY HARDWARE (where not standard)



Double-end hinge

3" Track

High performance hardware features 10 gauge end hinges, heavy-duty top bracket and 3" sealed roller with 5/8" stem.

### MULLIONS



Carry-away, roll-away or swing-up mullions are available on select sizes.

### BREAK-AWAY SECTION



Single section and double sections available on select sizes.

### EXHAUST PORT



Can be cut into any type of sectional door. Available in select sizes.



WindCode® reinforcement available up to W1 design pressure (DP) 14 PSF, depending on size. Doors tested 50% greater than DP.



Upgrade your standard door with industrial-grade components.

### HIGH CYCLE SPRINGS



25,000, 50,000 or 100,000 cycle springs available.

### CODE COMPLIANT

This Clipay door complies with the 2015 IECC (International Energy Conservation Code) with an air infiltration rating of .40 cfm/ft² or less (IECC, Section 402.5.2), and also meets the U-factor requirement of .37 or less (IECC, Section C402.4, for Climate Zones 1 through 8).



For more information on these and other Clipay products, call 1-800-526-4301 or visit [clipaycommercial.com](http://clipaycommercial.com)



©2018 Clipay Building Products Company, Inc., a Griffon company.



CMDC-3717-3718-11\_REV1018