
GALLERY® collection 3-LAYER CONSTRUCTION



America's Favorite Garage Doors®

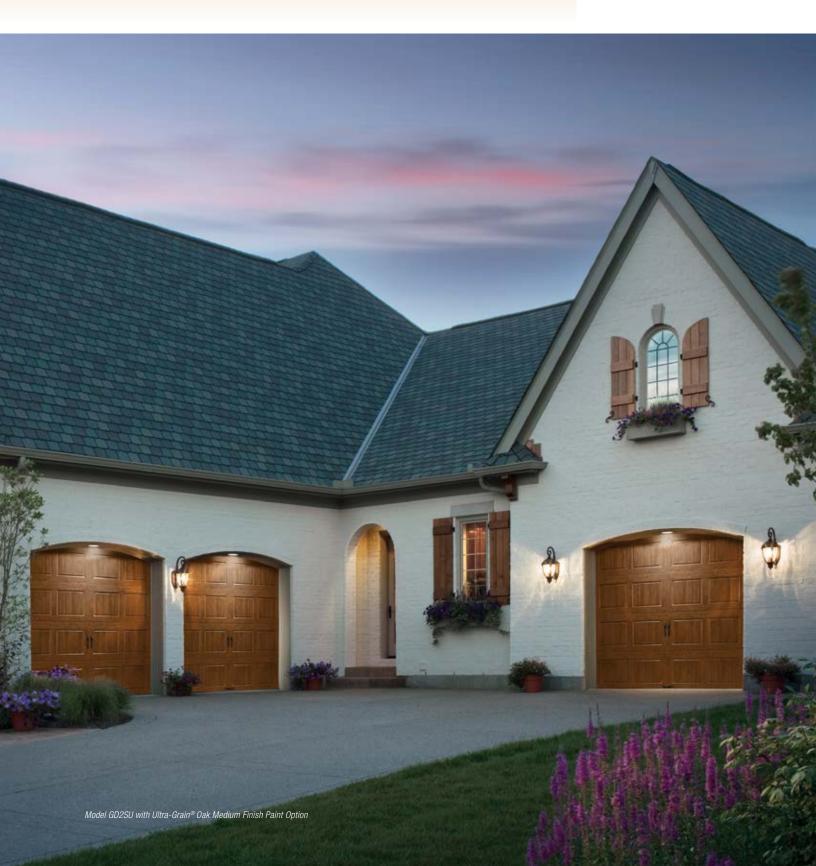

GALLERY[®] collection

The Gallery[®] Collection three-layer construction provides exceptional strength, energy efficiency and dent resistance as well as a beautiful carriage house appearance. The 2" or 1-3/8" thickness of Intellicore[®] polyurethane or bonded polystyrene insulation and thermal break makes these doors heat and cold resistant while the tongue-and-groove joint helps seal out wind, rain and snow. Available in short and long panels with multiple window options, the three-layer Gallery[®] Collection is virtually maintenance-free, so the first fabulous impression becomes a lasting impression.

intellicore[®] insulation technology

Warmer. Quieter. Stronger. Gallery[®] Collection doors featuring Intellicore® insulation technology represent the ultimate smart choice for homeowners. Clopay's Intellicore® is a proprietary polyurethane foam that is injected into a garage door, expanding to fill the entire structure. The result is a door with incredible strength and durability. Its dense insulation also produces a quieter door, and with one of the industry's leading R-values of 18.4, it provides year-round comfort and improved energy efficiency. Smart, indeed.





Calculated door section R-value is in accordance with DASMA TDS-163. Models with Ultra-Grain[®] and Black paint options are 25 gauge steel.



COLORS



- Exterior steel on standard color doors has a natural woodgrain texture.
- Doors can be painted to match the home's exterior using a high-quality latex exterior paint.
 Do not use oil-based paint.

*Popular in select markets, Glacier White is a brighter white.

CUSTOM PAINT OPTION

Color Blast[®] offers more than 1,500 Sherwin-Williams[®] color options to complement your home. Clopay's durable two-part paint system has been thoroughly tested and is backed by a five-year warranty.

ULTRA-GRAIN® PAINT OPTION



Medium Finish



Ultra-Grain® Oak Dark Finish



Ultra-Grain[®] Oak Walnut Finish

Ultra-Grain[®] Oak Slate Finish

- Painted steel surface simulates a real stained door without the need of staining and the ongoing maintenance of wood.
- Oak woodgrain runs horizontal on stiles and vertical on panels for an authentic, natural look.
- Available in Medium, Dark, Walnut or Slate finishes that complement Clopay Entry Doors, shutters and other exterior stained wood products.
- Exterior steel surface on an Ultra-Grain[®] painted door has a stucco texture to create a more natural woodgrain appearance.
- Window frames, grilles and inserts are color matched to coordinate with the Ultra-Grain[®] patterns.
 All window options are available.

SHORT PANEL WINDOW DESIGNS AND TOP SECTION OPTIONS

| SHORT PANEL | WINDOW DESIGNS ANI | D TOP SECTION OPTION | 10'6"-12'0" |
|--|------------------------------------|---|----------------------------|
| MODELS GD1SP, GD1SU, GD2SP AND GD2SU | HEIGHTS 7'0"-8'0" | Illustrations simplified for clarity. | 9'0"-10'0" |
| | WIDTHS 6'2"-7'6" 7'8"-10'0" 11'6"- | -14'6" 14'10"-19'0" 19'2"-2 | 0'0" 7'8"-10'0" 7'8"-10'0" |
| Long Top Section | | ARCH1 | |
| Plain Short | | Vertical Grille on ARCH1 | |
| | | | |
| Plain Long | | Grille on ARCH1 | |
| REC12 | | ARCH2 | |
| REC14 | | | |
| | | Vertical Grille on ARCH2 | |
| SQ22 | | Grille on ARCH2 | |
| SQ24 | | ARCH3 | |
| | | | |
| Trenton® Short† | | Vertical Grille on ARCH3 | |
| Trenton [®] Long [†] | | Grille on ARCH3 | |
| | | Clayton [™] Short [†] | |
| Kristin [®] Long† | | Clayton [™] Long [†] | |
| Wrought Iron Short** | | Wrought Iron Arch*t | |
| Wrought Iron Long* | | | |

*Acrylic

[†]Complements Clopay Entry Door glass.

Note: Due to stile width restrictions, some odd size door widths may allow only for the installation of a single handle. See your Clopay Dealer for details.

LONG PANEL WINDOW DESIGNS AND TOP SECTION OPTIONS

| LUNG PAN | | OW DESIGNS AND | | UN OPTIC | 10'6"-12'0" |
|--|-------|-------------------------------|---|-----------|--------------------------|
| MODELS GD1LP, GD1LL | | HEIGHTS 7'0" – 8'0" | Illustrations simplified for clari | ty. | 9'0"-10'0" |
| GD2LP AND G | GD2LU | WIDTHS 7'8"-10'0" 11'6"-14'6" | 14'10"-19'0" | 19'2"-20' | 0" 7'8"-10'0" 7'8"-10'0" |
| Short Top Section | | | ARCH1 | | |
| Plain Short | | | Vertical Grille on ARCH1 | | |
| Plain Long | | | Grille on ARCH1 | | |
| REC12 | | | ARCH2 | | |
| | | | | | |
| REC14 | | | Vertical Grille on ARCH2 | | |
| SQ22 | | | Grille on ARCH2 | | |
| SQ24 | | | ARCH3 | | |
| | | | | | |
| | | | Vertical Grille on ARCH3 | | |
| Trenton [®] Long [†] | | | Grille on ARCH3 | | |
| Ē | | | Clayton [™] Short [†] | | |
| Kristin [®] Long† | | | Clayton [™] Long† | | |
| Wrought Iron Short*† | | | Wrought Iron Arch*† | | |
| | | | | | |
| | | | | | |

*Acrylic

[†]Complements Clopay Entry Door glass.


Note: Due to stile width restrictions, some odd size door widths may allow only for the installation of a single handle. See your Clopay Dealer for details.

Windows

*Complements Clopay Entry Door glass.

Long and short windows may be used in any Gallery

3-layer model. Double-strength glass is standard. Optional obscure, 3/4" insulated and 3/4" insulated obscure glass is available on all Gallery 3-layer models. Additional charges for optional glass apply.

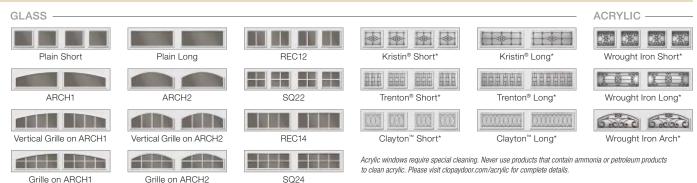

Windows are available single pane or insulated in clear, frosted, seeded, obscure and rain designs. Clear acrylic also available.

Clear Frosted Seeded Obscure

Additional Features







Large authentic arch window designs. Ultra-Grain® window frames, grilles and inserts are color coordinated to Medium, Dark, Walnut and Slate finishes. 14 gauge steel hinges.

2" thick polystyrene doors Energy-efficient thermal and all Intellicore® doors break. Polyurethane come standard with 10-ball model shown. nvlon rollers and heavy-duty

- Hot-dipped galvanized steel interior and exterior skins with a baked-on primer and top coat help ensure a virtually maintenance-free door with long-lasting beauty.
- Replaceable vinvl bottom weatherseal in a rust-resistant aluminum retainer helps seal out the elements.
- 2" thick polystyrene doors and all Intellicore[®] doors comply with 2015 IECC air infiltration requirement of 0.40 cfm/ft² or less (IECC, Section C402.5.2).
- See your Clopay Dealer for WINDCODE® door availability.

Warranties

| PAINT SYSTEM | WINDOW | HARDWARE |
|--------------|----------|----------|
| LIMITED | LIMITED | LIMITED |
| LIFE | 10 Y R | 3 Y R |
| WARRANTY | WARRANTY | WARRANTY |



For more detailed product specification information or availability of our Gallery® Collection Garage Doors, please contact your Clopay Dealer. To locate a dealer to help you select the right door for your home, just go to www.clopaydoor.com/dealer or call 1-800-2CLOPAY (225-6729).



Decorative Hardware




Note: Decorative hardware options vary based on door widths. Standard hardware is not provided if a lock is chosen. See your Clopay Dealer for details.

OPTIONAL



Spade Step Plate







Spade Strap Hinge' (Complements Spade I ift Handles and Spade Step Plate)

Spear Strap Hinge*†

[†] Aluminum construction. * Door may not open properly if installed near the top depending on opening dimensions and lift type See your Clopay Dealer for more details.



Clopay is committed to designing, manufacturing and distributing garage doors that enhance the beauty, safety and value of your home while minimizing the impact on the environment.

The Gallery[®] Collection three-layer construction helps conserve natural resources by providing a durable, reliable, low-maintenance, energy efficient door. Long-lasting steel doors and hardware are impervious to moisture and will not rot, warp or crack, and the steel used in Clopay's doors is made from over 75% recycled content. All Clopay doors are made in the U.S., minimizing shipping, damage and handling.

For more details on Clopay's green practices visit clopaydoor.com/green

